



ATTRIBUTES:

LINER

13g Gray Polyester Liner

COATING

Gray Polyurethane
Palm Coating

FEATURES:

- Excellent Dexterity and Optimal Tactile Sensitivity

APPLICATIONS:

- General Assembly
- Inspection
- Quality Control
- Light Manufacturing

Armor Guys reference number : 06-026

CATEGORY:


Duty

CARE INSTRUCTIONS:

Recommended washing temperature is between 40°C and 60°C (104 - 140°F) with mild detergent.

The drying process may cause felting on the fabric surface. Drying temperatures should not exceed 70°C (158°F)

TECHNOLOGIES:

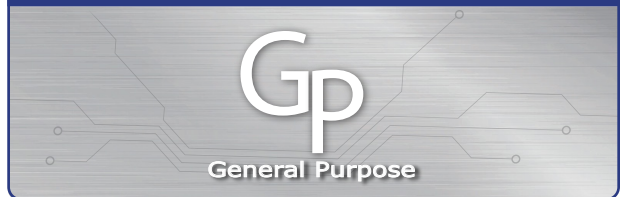

⚠ This product can expose you to N,N-Dimethylformamide- which is known to the State of California to cause cancer. For more information go to www.P65warnings.ca.gov

SPECIFICATIONS

LINER MATERIALS	13g Gray Polyester Liner
COATING MATERIALS	Gray Polyurethane
SIZES	XS-XXL

PACKAGING						
CASE SIZE	XS	S	M	L	XL	XXL
PER CARTON	12DZ	12DZ	12DZ	12DZ	12DZ	12DZ
CUFF COLOR	Purple	Red	Yellow	Brown	Black	Blue
ORIGIN	PRC					

PERFORMANCE LEVEL

EN388: 3121	EN Level 1 Cut Resistance					
ABRASION	0	1	2	3	4	5
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	5
PUNCTURE	0	1	2	3	4	5