




ARMOR GUYS

• PROTECTED •



01-027 SPECIFICATION SHEET



ATTRIBUTES:

LINER

13g Blue Taeki5® A4 Liner

COATING

Black HCT® MicroFoam Nitrile Palm Coating

FEATURES:

- Light Heat Resistance
- Moisture Wicking

APPLICATIONS:

- Assembly
- Metal Stamping
- Sheet Metal Handling
- Plastics
- Construction

Armor Guys Reference Number: 01-027

CATEGORY:

Taeki5®

SPECIFICATIONS


LINER MATERIALS	13g Blue Taeki5® A4 Liner
COATING MATERIALS	Black HCT® MicroFoam Nitrile
WRIST DESIGN	Continuous Knit
SIZES	XS-XXL

PACKAGING						
CASE SIZE	XS	S	M	L	XL	XXL
PER CARTON	10DZ	10DZ	10DZ	10DZ	10DZ	10DZ
CUFF COLOR	Purple	Red	Yellow	Brown	Black	Blue
ORIGIN	PRC					

PERFORMANCE LEVEL

EN388: 4442D	EN Level 4 Cut Resistance						
ABRASION	0	1	2	3	4	5	X
CUT	0	1	2	3	4	5	X
TEAR	0	1	2	3	4	5	X
PUNCTURE	0	1	2	3	4	5	X
CUT TDM TEST	A	B	C	D	E	F	

TECHNOLOGIES:

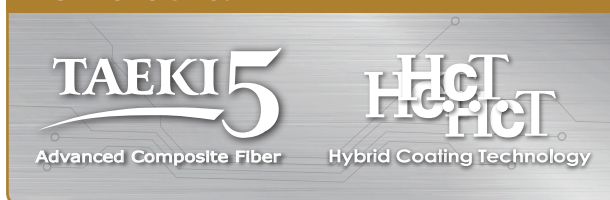

Performance	TAEKI5®	HDPE* UHMWPE**	META-ARAMID PARA-ARAMID
Abrasion Resistance	++	++	-
Cut Resistance	++	+	-
Heat Contact Resistance	+	x	+
Washing	++	+	-
UV Resistance	++	++	x
Lint Free	++	++	x
Any Color Available	++	-	-
Comfort	++	++	+
Variety of Coating Available Including Nitrile, PVC and Latex	++	-	+
Quality/Price Ratio	++	-	+
Total Performance	+29	+19	+12

*HDPE=High Density Polyethylene
 **UHMWPE=Ultra High Molecular Weight Polyethylene

Testing Method based on both CE and ANSI standard

CARE INSTRUCTIONS:

Recommended washing temperature is between 40°C and 60°C (104 - 140°F) with mild detergent.

The drying process may cause felting on the fabric surface. Drying temperatures should not exceed 70°C (158°F)